

TECHNICAL INFORMATION:

MANUFACTURING METHOD
Wilton Flatwoven

TOTAL CARPET THICKNESS
± 4,0 mm

PILE SURFACE
Loop (flat weave)

BACKING
P.P. & Latex

PILE COMPOSITION
100% Outdoor Recycled PET


COUNTRY OF ORIGIN
Spain

PILE WEIGHT
± 1.500 g/m²

MANUFACTURING WIDTH
± 4,00 m

TOTAL CARPET WEIGHT
± 2.400 g/m²

SUITABILITY
Indoor / Outdoor

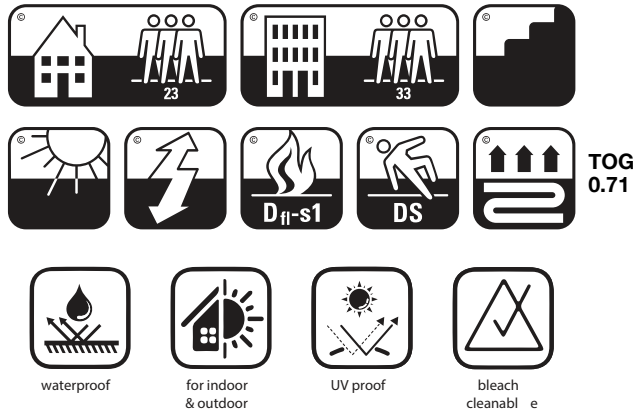

PRODUCT SPECIFIC INFORMATION:

Colour, pattern and textural batch matching: Slight differences will exist between different production batches and dyelots. Where a precise match is required, we recommend a stock cutting from the current material batch is requested before order placement.

Seaming and Joins in Flatweave Structures The cutting and seaming together of a flatweave is a precise and time consuming process with the resulting join likely to be variable in appearance. The durability of seams cannot be guaranteed in multi-width installations. For this reason we do not recommend either side to side or end to end joins in our flatweave structures.

All product specific characteristics, installation & maintenance For installation guidelines (wall-to-wall), specific information and maintenance please visit www.moquetasrols.com to download our product specific Quick Fit Guides and our Carpet Care and Maintenance booklet.

