



TECHNICAL INFORMATION:

MANUFACTURING METHOD
Wilton Flatwoven

TOTAL CARPET THICKNESS
± 4,0 mm

PILE SURFACE
Loop (flat weave)

BACKING
Jute & Latex

PILE COMPOSITION
100% Wool


MANUFACTURING WIDTH
± 4,00 m

PILE WEIGHT
± 900 g/m²

COUNTRY OF ORIGIN
Spain

TOTAL CARPET WEIGHT
± 2.000 g/m²

LEED®
Serena fulfills the requirements for
LEED certified buildings (EQC 4.3)

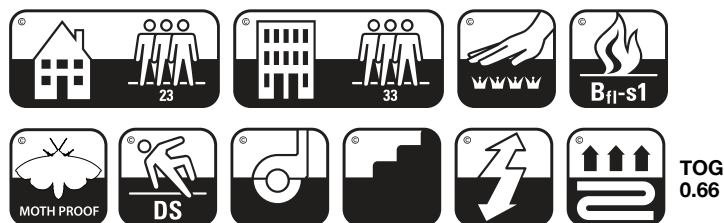

EN 14041
EN 1307



Wool
CHOICE



PRODUCT SPECIFIC INFORMATION:

Colour, pattern and textural batch matching: Slight differences will exist between different production batches and dyelots. Where a precise match is required, we recommend a stock cutting from the current material batch is requested before order placement.

Colour fastness to light: The pile yarns in our carpets are manufactured using dyeing techniques that meet strict environmental regulations. In common with all other dyed textiles, carpet will lose colour if exposed to sustained sunlight. Colour fading is not considered a manufacturing defect.

Installation on Stairs: The stair nosing is a point of high friction and stair carpets must be installed in conjunction with a high quality heavy use underlay that covers the tread, nosing and riser. Other important points regarding installation on stairs are available to download in the product specific characteristics sheet.

All product specific characteristics, installation & maintenance: For installation guidelines (wall-to-wall), specific information and maintenance please visit www.moquetasrols.com to download our product specific Quick Fit Guides and our Carpet Care and Maintenance booklet.

ISSUE N°: 2020-01-SER