

THE SELECT ENTRY

BLOQ
creative
carpet tiles



ENTRY 913 SILVER



ENTRY 511 SKY



ENTRY 512 NAVY



ENTRY 914 FOG



ENTRY 913 SILVER




ENTRY 112 SAND



ENTRY 916 BASALT



ENTRY 917 ONYX

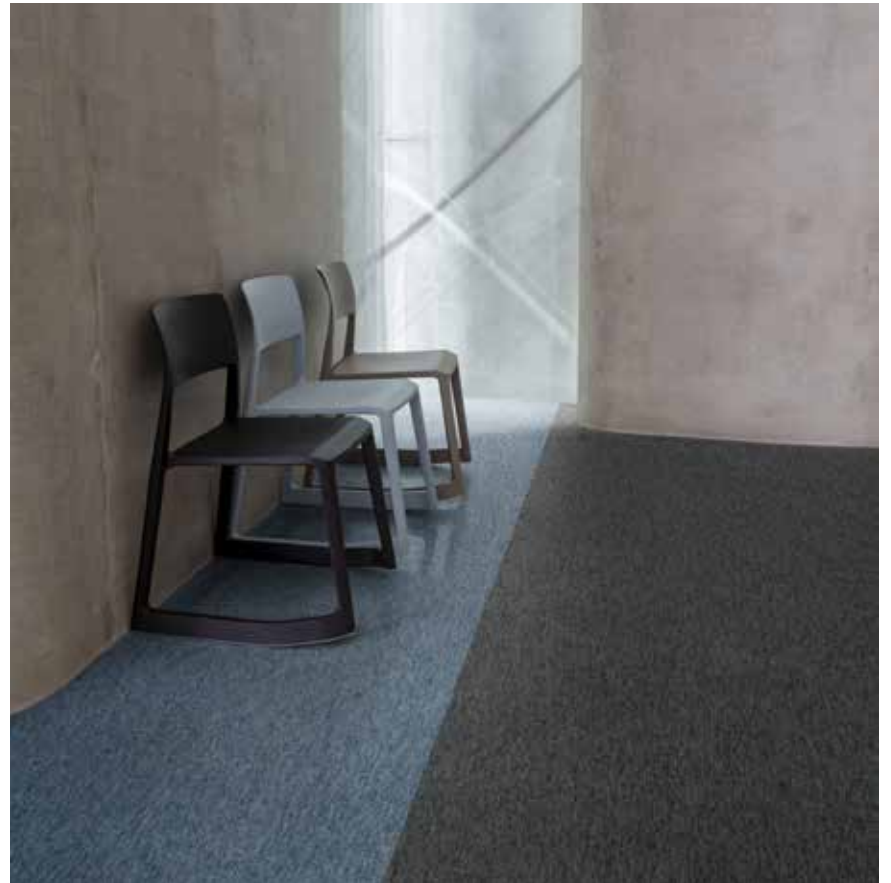

ENTRY 511 SKY & 914 FOG

BLOQ

creative
carpet tiles





THE SELECT ENTRY

SPECIFICATIONS

TYPE OF MANUFACTURE	Tufted Loop Pile 1/10"
	ISO 2424
PILE FIBER COMPOSITION	100% Polypropylene
	ISO 2424 Solution Dyed
SECONDARY BACKING	Bitback, Modified Bitumen
	ISO 2424 70% Recycled Content
DIMENSION	50 x 50 cm
	EN ISO 24342
PILE WEIGHT	450 g/m ²
	ISO 8543
SURFACE PILE WEIGHT	285 g/m ²
	ISO 8543
TOTAL WEIGHT	4 100 g/m ²
	ISO 8543
TOTAL THICKNESS	5.6 mm
	ISO 1765
PILE HEIGHT	2.5 mm
	ISO 1766
PILE DENSITY	0.115 g/m ³
	ISO 8543
NUMBER OF TUFTS	151 000 /m ²
	ISO 1763
DIMENSIONAL STABILITY	≤ 0.2%
	ISO 2551
NUMBER OF COLOURS	7
PACKAGING	Box: 20 tiles / 5 m ²
	Pallet: 200 m ²

PERFORMANCE

CLASSIFICATION	31
	EN 1307
LUXURY RATING	LC1
	EN 1307
CASTOR CHAIR RATING	B: Occasional use
	EN 985
FIRE CLASSIFICATION	C _f -s1
	EN 13501-1
IMPACT SOUND INSULATION	ΔL _w : 23 dB
	EN ISO 10140-3
SOUND ABSORPTION	Frequency Hz
	125 250 500 1000 2000 4000
	EN ISO 354
	α _s 0.01 0.01 0.04 0.11 0.28 0.30
NOISE REDUCTION	α _w : 0.10
	EN ISO 354
PERMANENT ANTISTATIC	≤ 2 kV
	ISO 6356
THERMAL RESISTANCE	0.057 m ² K/W
	ISO 8302
COLOUR FASTNESS TO LIGHT	≥ 5-6
	EN ISO 105-B02
COLOUR FASTNESS TO WATER	≥ 4-5
	EN ISO 105-E01
RUBBING FASTNESS	≥ 4
	EN ISO 105-X12
GUT N° PRODIS	05F76903



22/06/2023

All rights reserved to alter technical specifications.